

Programmes After Market Services

NHM-5NX Series Transceivers

General Information


Table of Contents

	Page No
NHM-5NX Product Selection	3
Handportables	3
Desktop Option	4
Accessories List	6
Product Variants	7
Technical Specifications	7
General Specifications of Transceiver NHM-5NX	7

NHM-5NX Product Selection

Handportables

The NHM-5NX is a dual band handportable mobile telephone for the E- GSM900 and 1800 Networks

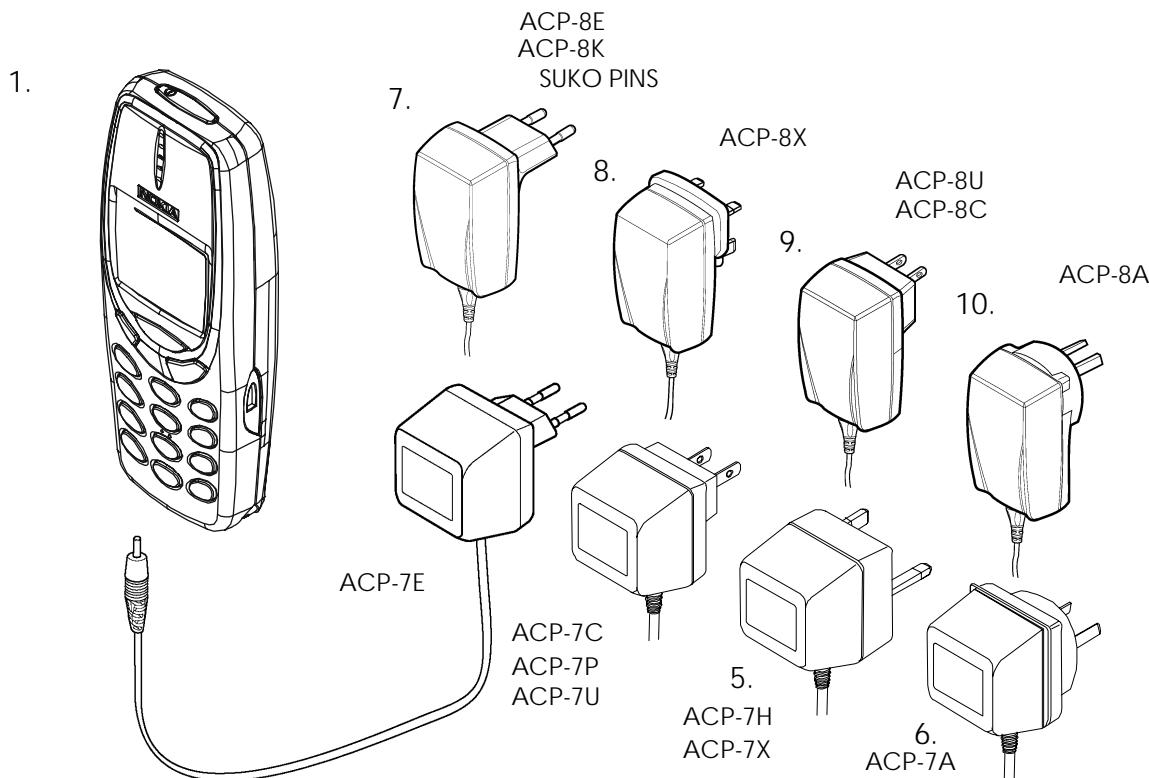


Item	Name:	Type code:	Material code:
1.	Transceiver	See Product Variants	
2.	Standard battery (Li-ion 650 mAh)	BLB-2	0670246
3.	AC Travel Charger (Europlug) 207-253 Vac	ACP-7E	0675144
4.	AC Travel Charger (USplug) 108-132 Vac	ACP-7U	0675143
	AC Travel Charger (USplug) 207-253 Vac	ACP-7P	0675147
	AC Travel Charger (USplug) 198-242 Vac	ACP-7C	0675158
5.	AC Travel Charger (UKplug) 207-253 Vac	ACP-7X	0675145
	AC Travel Charger (UKplug) 180-220 Vac	ACP-7H	0675146
6.	AC Travel Charger (Australia) 216-264 Vac	ACP-7A	0675148

7.	Performance Travel Charger	Euro plug 90-264 Vac	ACP-8E	0675195
	Performance Travel Charger	Korea plug 90-264 Vac	ACP-8K	0675199
8.	Performance Travel Charger	UK plug 90-264 Vac	ACP-8X	0675197
9.	Performance Travel Charger	US plug 90-264 Vac	ACP-8U	0675196
	Performance Travel Charger	China plug 90-264 Vac	ACP-8C	0675211
10.	Performance Travel Charger	Australia plug 90-264 Vac	ACP-8A	0675214

Desktop Option

The desktop option allows the user to charge the phone from the mains supply.

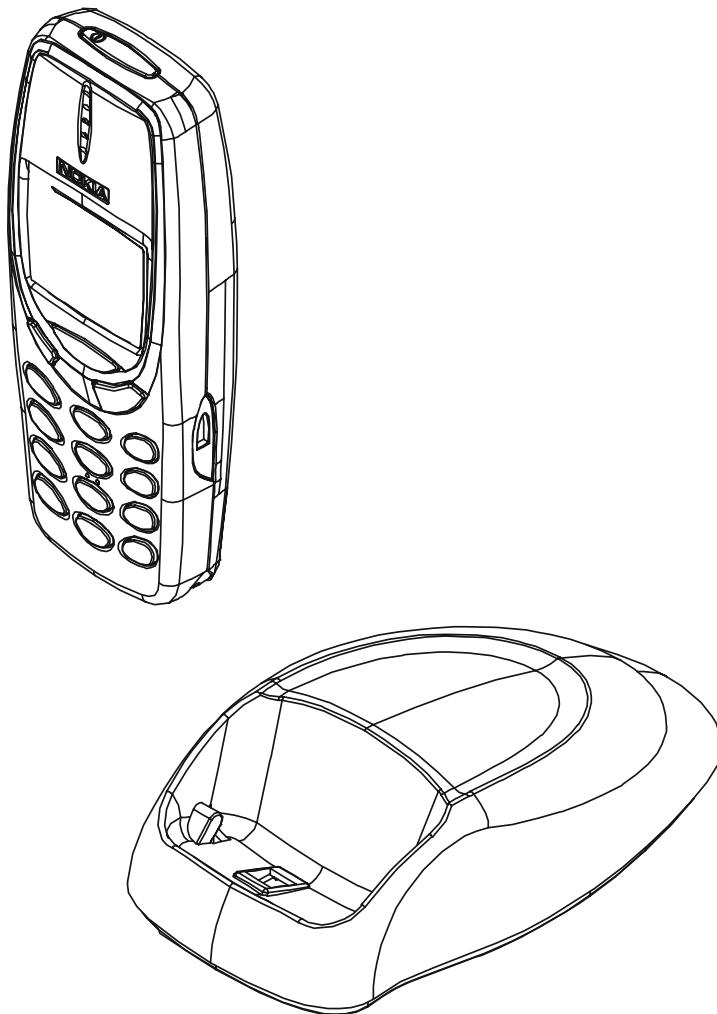

Item	Name:	Type code:	Material code:
1.	Transceiver	See Product Variants Table	
2.	Desk Stand	DCV-10	0675203
3.	AC Travel Charger (Europlug) 207-253 Vac	ACP-7E	0675144
4.	AC Travel Charger (USplug) 108-132 Vac	ACP-7U	0675143
	AC Travel Charger USplug) 207-253 Vac	ACP-7P	0675147
	AC Travel Charger (USplug) 198-242 Vac	ACP-7C	0675158
5.	AC Travel Charger (UKplug) 207-253 Vac	ACP-7X	0675145
	AC Travel Charger UKplug) 180-220 Vac	ACP-7H	0675146
6.	AC Travel Charger Australia) 216-264 Vac	ACP-7A	0675148
7.	Performance Travel Charger Euro plug 90-264 Vac	ACP-8E	0675195
	Performance Travel Charger Korea plug 90-264 Vac	ACP-8K	0675199
8.	Performance Travel Charger UK plug 90-264 Vac	ACP-8X	0675197
9.	Performance Travel Charger US plug 90-264 Vac	ACP-8U	0675196
	Performance Travel Charger China plug 90-264 Vac	ACP-8C	0675211
10.	Performance Travel Charger Australia plug 90-264 Vac	ACP-8A	0675214

Accessories List

Unit/type:	Product code:
Battery BLC-2 850 mAh Li-ion	0670279
Battery BMC-3 900mAH NiMH	0620285
AC Travel Charger ACP-7E (EUR) 207-253 Vac	0675144
AC Travel Charger ACP-7U (US) 108-132 Vac	0675143
AC Travel Charger ACP-7P (US) 207-253 Vac	0675147
AC Travel Charger ACP-7C (US) 198-242 Vac	0675158
AC Travel Charger ACP-7X (UK) 207-253 Vac	0675145
AC Travel Charger ACP-7H (UK) 180-220 Vac	0675146
AC Travel Charger ACP-7A (AUS) 216-264 Vac	0675148
Performance Travel Charger ACP-8E (EUR) 90-264 Vac	0675195
Performance Travel Charger ACP-8K (Korea) 90-264 Vac	0675199
Performance Travel Charger ACP-8X (UK) 90-264 Vac	0675197
Performance Travel Charger ACP-8U (US) 90-264 Vac	0675196
Performance Travel Charger ACP-8C (China) 90-264 Vac	0675211
Performance Travel Charger ACP-8A (Australia) 90-264 Vac	0675214
Headset HDC-5	0694059
Loopset LPS-1	0630244
Holster HHC-4	0720190
Desk Stand DCV-1	0675203
HF Microphone HFM-8	0690016
Plug&Play HF Cigarette Lighter Charger PPH-1	0675182
Cigarette Lighter Charger LCH-8	0675231
Cigarette Lighter Charger LCH-9	0675120

Product Variants

Product Modules	Manufacturer	Code Number
UP4	Hitachi (EUR)	0201477
UP4 II	Hitachi (APAC)	0201695
UP4 III	Hitachi	0201702

Note: Schematics and Component layouts diagrams (UB4_xxx) are common to all the above modules. However for component values please refer to the appropriate parts list shown in the System Module chapter

Technical Specifications

General Specifications of Transceiver NHM-5NX

Parameter	Unit
Cellular system	EGSM900 and GSM1800
RX frequency band	EGSM: 925 ... 960 MHz GSM900 935 ... 960 MHz GSM1805 ... 1880 MHz
TX frequency band	EGSM 880 ... 890 MHz GSM900 890 ... 915 MHz GSM1800 1710 ... 1785 MHz
Output power	GSM900 * +5 ...+33 dBm / 3.2 mW ... 2 W GSM1800 +0 ...+30 dBm / 1.0 mW ... 1 W
Duplex spacing	GSM900 * 45 MHz GSM1800 95 MHz
Number of RF channels	EGSM 50 GSM900 174 GSM1800 374
Channel spacing	200 kHz
Number of TX power levels	GSM900 * 15 GSM1800 16
Sensitivity, static channel	GSM900: -102 dBm GSM1800: -102 dBm
Frequency error, static channel	< 0.1 ppm
RMS phase error	< 5.0 °
Peak phase error	< 20.0 °

This page Intentionally blank